

## POWER ANYTIME

### GSW720P



#### Main Features

|              |            |     |
|--------------|------------|-----|
| Frequency    | Hz         | 50  |
| Voltage      | V          | 400 |
| Power factor | cos $\phi$ | 0.8 |
| Phase        |            | 3   |

#### Power Rating

|                             |     |        |
|-----------------------------|-----|--------|
| Emergency Standby Power ESP | kVA | 723.19 |
| Emergency Standby Power ESP | kW  | 578.55 |
| Prime power PRP             | kVA | 670.94 |
| Prime power PRP             | kW  | 536.75 |

#### Ratings definition (ISO-8528)

##### ESP - Emergency Standby Power:

It is the maximum power available during a variable electrical power sequence, under the stated operating conditions, for which a generating set is capable of delivering in the event of a utility power outage or under test conditions for up to 200 h of operation per year with the maintenance intervals and procedures being carried out as prescribed by the manufacturers. The permissible average power output over 24 h of operation shall not exceed 70 % of the ESP.

##### PRP - Prime Power:

It is defined as being the maximum power which a generating set is capable of delivering continuously whilst supplying a variable electrical load when operated for an unlimited number of hours per year under the agreed operating conditions with the maintenance intervals and procedures being carried out as prescribed by the manufacturer. The permissible average power output over 24 h of operation shall not exceed 70 % of the prime power.

## Engine specifications

|                                   |                        |       |
|-----------------------------------|------------------------|-------|
| Engine Brand                      | Perkins                |       |
| Model                             | 2806A - E18TAG2        |       |
| [50Hz] Exhaust emission level     | Non Emission Certified |       |
| Engine cooling system             | Water                  |       |
| Nr. of cylinder and disposition   | 6 in line              |       |
| Displacement                      | cm <sup>3</sup>        | 18130 |
| Aspiration                        | Turbocharged           |       |
| Speed governor                    | Electronic             |       |
| Prime gross power PRP             | kW                     | 584   |
| Maximum gross power LTP ESP       | kW                     | 628   |
| Oil capacity                      | l                      | 62    |
| Lube oil consumption PRP (max)    | %                      | 0.1   |
| Coolant capacity                  | l                      | 61    |
| Fuel                              | Diesel                 |       |
| Specific fuel consumption 75% PRP | g/kWh                  | 198   |
| Specific fuel consumption PRP     | g/kWh                  | 202   |
| Starting system                   | Electric               |       |
| Starting engine capability        | kW                     | 9     |
| Electric circuit                  | V                      | 24    |



### Cooling system

- Gear-driven circulating pump
- Low coolant level switch
- Mounted belt-driven fan
- Radiator incorporating air-to-air charge cooler, (supplied loose)
- System designed for ambients up to 50°C (122°F)

### Fuel system

- Fuel cooler
  - Governing to ISO 8528-5 class G2 with isochronous capability
- Mechanically actuated electronically controlled unit fuel injectors with full authority electronic control
- Replaceable 'Ecoplus' fuel filter elements with primary filter/water separator

### Oil system

- Full-flow replaceable 'Ecoplus' filter
- Oil cooler integral with filter header
- Wet sump with filler and dipstick

## Alternator Specifications

|                       |            |      |
|-----------------------|------------|------|
| Alternator            | Mecc Alte  |      |
| Model                 | ECO40-2L   |      |
| Voltage               | V          | 400  |
| Frequency             | Hz         | 50   |
| Power factor          | cos $\phi$ | 0.8  |
| Poles                 | 4          |      |
| Type                  | Brushless  |      |
| Standard AVR          | DER1-A     |      |
| Voltage tolerance     | %          | 1    |
| Efficiency @ 75% load | %          | 95.2 |
| Class                 | H          |      |
| IP protection         | 23         |      |



### Mechanical structure

Robust mechanical structure which permits easy access to the connections and components during routine maintenance check-ups.

### Voltage regulator

Voltage regulation with DER 1. The digital DER 1 is a Digital controlled regulator, based on DSP (Digital Signal Processor) that combines function as Voltage Regulation and Alternator Protections and Diagnostic into a very small single board.

Voltage supply: 40Vac÷270Vac

Maximum continuous output current: 4Adc

Frequency range: 12Hz÷72Hz

Single phase sensing automatic recognition

Average value of voltage regulation

Voltage regulation range (sensing) from 75Vac to 300Vac

Precision of voltage regulation:  $\pm 1\%$  from no-load to nominal load in static condition, with any power factor and for frequency variations ranging from -5% to +20% of the nominal value.

Precision of voltage regulation:  $\pm 0,5\%$  in stabilized conditions (load, temperature).

Transient voltage drop and overvoltage within  $\pm 15\%$

Voltage recovery time within  $\pm 3\%$  of the value set, in less than 300 msec.

Underspeed protection with adjustable threshold and slope

Overvoltage and undervoltage alarms

Excitation overcurrent protection with delayed intervention

Alarm conditions storage (type of alarm, number of events, duration of the last event, total time)

Memorization of the regulator operation time

### Windings / Excitation system

Generator stator is wound to 2/3 pitch. This eliminates triple (3rd, 9th, 15th ...) harmonics on the voltage waveform and is found to be the optimum design for trouble-free supply of non-linear loads. The 2/3 pitch design avoids excessive neutral currents sometimes seen with higher winding pitches. MAUX (Standard): The MAUX MeccAlte Auxiliary Winding is a separate winding within the main stators that feeds the regulator. This winding enables to take an overload of 300% forced current (short circuit maintenance) for 20 seconds. This is ideal for motor starting requirements. PMAUX (optional): Alternator can be equipped with the optional PMAUX (Permanent Magnet Generator) which matches the performance and is capable of supporting both linear and distorted loads.

### Insulation / Impregnation

Insulation is of class H standard. Impregnation is made with premium tropicalised epoxy resins by dipping and dripping. High voltage parts are impregnated by vacuum, so the insulation level is always very good. In the high-power models, the stator windings undergo a second insulation process. Grey protection is applied on the main and exciter stator to give enhanced protection.

### Reference standards


Alternator manufactured according to , and complies with , the most common specification such as CEI 2-3, IEC 34-1, EN 60034-1, VDE 0530, BS 4999-5000, CAN/CSA-C22.2 No14-95-No100-95



## Genset equipment

### BASE FRAME MADE OF WELDED STEEL PROFILE, COMPLETE WITH:

- Anti-vibration mountings properly sized
- Welded or Screwed support legs. (according to canopy size)

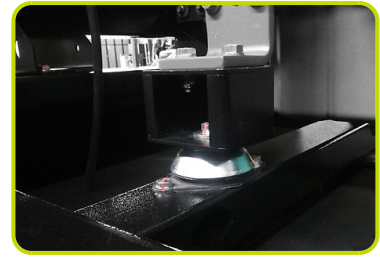

### PLASTIC FUEL TANK WITH THE FOLLOWING COMPONENT:

- Filler neck
- Air breather (ventilation pipe)
- Minimum fuel level sensor



### MANUAL OIL DRAININ PUMP:

- Oil draining facilities



### ENGINE COMPLETE WITH:

- Battery
- Liquids (no fuel)



### CANOPY:

- Soundproof canopy made up of modular panels, realized with zinc plated steel as treatment against corrosion and aggressive conditions, properly fixed and sealed allowing a full weatherproof enclosure.
- Easy access to the genset for maintenance purposes thanks to: Wide lateral access doors fixed by stainless steel hinges and provided with plastic lockable handles and internal perforated galvanized steel-sheet; Detachable panels, with screws holes protected by rubber tap.
- Control panel protection door provided with suitable window and lockable handle.
- Lateral air inlet opening properly protected and soundproofed. Exhaust air outlet from the roof, through wet section protected by proper grid.
- Double lifting points frame structure.


### SOUNDPROOF:

- Noise attenuation thanks to soundproofing material
- Efficient residential silencer placed inside the canopy



### Dimensional data

|                    |        |         |
|--------------------|--------|---------|
| Length             | (L) mm | 4700    |
| Width              | (W) mm | 1700    |
| Height             | (H) mm | 2510    |
| Dry weight         | kg     | 5480    |
| Fuel tank capacity | l      | 636     |
| Fuel tank material |        | Plastic |

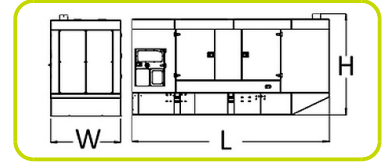

### Autonomy

|                             |     |        |
|-----------------------------|-----|--------|
| Fuel consumption @ 75% PRP  | l/h | 104.15 |
| Fuel consumption @ 100% PRP | l/h | 140.44 |
| Running time 75% PRP        | h   | 6.11   |
| Running time 100% PRP       | h   | 4.53   |

### Noise level

|                              |       |     |
|------------------------------|-------|-----|
| Guaranteed noise level (LWA) | dB(A) | 105 |
| Noise pressure level @ 7 m   | dB(A) | 75  |

### Installation data

|                                 |                     |        |
|---------------------------------|---------------------|--------|
| Total air flow                  | m <sup>3</sup> /min | 793.00 |
| Exhaust gas flow PRP            | m <sup>3</sup> /min | 106    |
| Exhaust gas temperature LTP ESP | °C                  | 553    |

### Electrical Data

|                 |   |         |
|-----------------|---|---------|
| Max current     | A | 1043.86 |
| Circuit breaker | A | 1000    |

### Control panel availability

|                         |     |
|-------------------------|-----|
| AUTOMATIC CONTROL PANEL | ACP |
| MODULAR PARALLEL PANEL  | MPP |

## ACP - Automatic control panel

Mounted on the genset, complete with digital control unit AC03 for monitoring, control and protection of the generating set, protected through door with lockable handle

### DIGITAL INSTRUMENTATION

- Generating set voltage (3 phases)
- Mains voltage
- Generating set frequency
- Generating set current (3 phases)
- Battery voltage
- Power (kVA - kW - kVAr)
- Power factor Cos  $\phi$
- Hours-counter
- Engine speed r.p.m.
- Fuel level (%)
- Engine temperature (depending on model)

### COMMANDS AND OTHERS

- Four operation modes: OFF - Manual starting - Automatic starting - Automatic test
- Pushbutton for forcing Mains contactor or Genset contactor
- Push-buttons: start/stop, fault reset, up/down/page/enter selection
- Remote starting availability
- DC system disconnection switch
- Acoustic alarm
- Automatic battery charger
- RS232 Communication port
- Settable PASSWORD for protection level

### PROTECTIONS WITH ALARM

- Engine protections: low fuel level, low oil pressure, high engine temperature
- Genset protections: under/over voltage, overload, under/over frequency, starting failure, under/over battery voltage

### PROTECTIONS WITH SHUTDOWN

- Engine protections: low fuel level, low oil pressure, high engine temperature
- Genset protection: under/over voltage, overload, under/over battery voltage, battery charger failure
- Circuit breaker protection: III poles
- Earth Fault included in the control unit

### OTHERS PROTECTIONS

- Emergency stop button
- Panel protected through door with lockable handle



### OUT PUT PANEL ACP

|  |          |
|--|----------|
| Predisposed for remote control optional: | RCG      |
| External Terminal Board (ETB)            | Standard |
| Socket kit                               | Optional |



## MPP - Modular parallel panel

Mounted on the genset, complete with digital control unit IntelliVision5 for monitoring, control, protection and load sharing for both single and multiple gen-sets operating in standby or parallel modes (up to 32 gen-sets in island).

### DIGITAL INSTRUMENTATION

- Mains: voltage, Intensity, Frequency.
- Mains kW - kVAr -Power factor Cos f.
- Generating set voltage (3 phases).
- Generating set frequency.
- Generating set current (3 phases).
- Generating set Power (kVA - kW - kVAr).
- Generating set Power factor Cos f.
- Generating set kWh and kVAh.
- Battery voltage.
- Hours-counter.
- Engine speed r.p.m.
- Fuel level (%).
- Engine temperature (depending on model).
- Oil pressure (depending on model).

### COMMAND AND OTHERS

- Graphical display 320x240 pixels.
- Operation modes: OFF - AMF function - Single Parallel to mains Island application - Single Parallel to Mains AMF application - Multiple parallel genset Island application.
- Pushbutton for forcing Mains Breaker/contactor or Genset Breaker/contactor.
- Push-buttons: start/stop, fault reset, up/down/page/enter selection.
- Multiple parallel and Power Management operation with digital load AVR sharing.
- Automatic synchronizing and power control (via speed goveroner or ECU)
- Baseload Import/Export and Peak shaving
- Voltage and PF control (AVR).
- Configurable digital I/O (12/12) and analogue inputs (3).
- Integrate PLC programmable functions.
- Event-based history (up to 500records).
- Selectable measurement range 120/277V and 0-1/0-5A.
- Remote starting and Blocking signal availability.
- DC system disconnection switch.
- Acoustic alarm.
- Automatic battery charger.
- 2xRS232/RS485/USB Communication ports.
- Settable PASSWORD for protection level.

### PROTECTION WITH ALARM AND SHUTDOWN

- Engine protections: low fuel level, low oil pressure, high engine temperature.
- Genset protections: under/over voltage, overload, under/over frequency, starting failure, under/over battery voltage
- Others: overcurrent, shortcircuit, reverse power, Earth fault

### OTHERS PROTECTION:

- Circuit breaker protection: IV poles Motorized.
- Emergency stop button.
- Panel protected through door with lochetable handle

### OUT PUT PANEL MPP

|   |   |     |
|---|---|-----|
| Multi-pin connectors (in and out ) for parallel with other generators | n | 2   |
| Connecting cable with 2 connectors multipin (length 10m)              | n | 1   |
| External terminal board   |   | ETB |



## Supplements:

To be ordered with equipment (when necessary) :

### CONTROL PANEL SUPPLEMENT

|   |         |
|---|---------|
| RCG - Various supplements for remote controls - available for models: | ACP MPP |
| TLP - Various supplements for remote signals - available for models:  | ACP MPP |
| ADI - Adjustable Differential Intensity - available only for models:  | ACP     |
| TIF - IV Poles Circuit Breaker instead of III - available for models: | ACP     |



### Socket kit

|   |     |   |
|---|-----|---|
| Kit SKB or Kit SKC (for total n. 4 socket) - available for model: | ACP |   |
| Individual CB and Earth Fault protection                          |     |   |
| 3P+N+T 400V 63A   | n   | 1 |
| 3P+N+T CEE 400V 32A   | n   | 1 |
| 230V/16A SCHUKO   | n   | 1 |
| With version SKB:   |     |   |
| 3P+N+T CEE 400V 16A   | n   | 1 |
| With version SKC:   |     |   |
| 400V/125A 3P+N+T CEE  | n   | 1 |



### GENSET EQUIPMENT

|                           |         |
|---------------------------|---------|
| LPT - Leak Proof Tray     |         |
| AFP - Automatic Fuel Pump | ACP MPP |

### ENGINE SUPPLEMENTS

|  |         |
|--|---------|
| PHS - Coolant Pre-Heating System - available for models: | ACP MPP |
|--|---------|



## Accessories

Items available as accessory equipment


### LTS - Load Transfer Switch [Accessories for ACP Automatic Control Panel]

The Load Transfer Switch (LTS) panel operates the power supply changeover between the generator and the Mains in backup applications, guarantying the feeding to the load within a short period of time.

It consists of a standalone cabinet which can be installed separate from the generating set. The logic control of the power supply changeover is operated by means of the Automatic Control Panel (ACP) mounted on the generating set, so therefore none logic device is required on the LTS panel.

#### LTS Type ATyS\_D:

- Box type: steel enclosures
- Installation mode: Wall mounted <400A; Floor Standing =>630A
- Door: Hinged door closed with double barb locking.
- Ingress Protection: IP43
- Gland Plates: Removable on the top & bottom side
- Connections: Bottom/Bottom
- Motor unit
- Gland Plates: Removable on the top & bottom side
- Connections: Bottom/Bottom
- Motor unit
- Switch position indicator
- Auto/Manual cover selector
- Housing for manual handle
- Padlocking mechanism
- Two side by side mounted load break switches
- Poles 4
- Double coils self-powered
- Voltage (coils): 208/277VAC (Tolerance+/-20% 166/333VAC)
- Frequency 50 & 60HZ
- Interface ATyS D10, fixed on the door for the status indication: Two lights to indicate the voltage presence of the grid and the diesel generator; Two lights for the switch position; Functionality mode (auto/manual) and cover protection IP65.
- Compliant with IEC 60947-3, EN 61439-6-1 and GB 14048-11

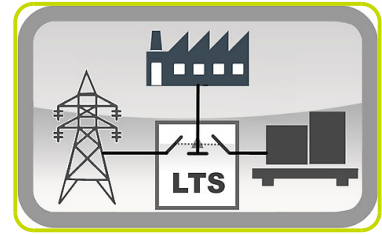

#### LTS SUPPLEMENTS AVAILABLE ON REQUEST:

- **ESB** - Emergency Stop Button (installed on the panel front)
- **APP** - Additional IPXXB Protection (internal plexiglass)