

DGPL66C - 3

50 Hz @ 1500rpm, 3-phase /
5-wiring

66kVA
CUMMINS
DGPL66C - 3

A. STANDARDS & CONDITIONS

Design Standards

The designs and the productions are in conformity with:

- Conformance Europeenne (CE)
- China Compulsory Certification (CCC)
- ISO8528-5:2005
- GB/T2820.5-2009
- AS 3000-1997
- AS 3010.1-1988

Environmental Operating Conditions

- Installation place: Outdoors or indoors (well ventilated)
- Ambient temperature: -25°C to 50°C. The coolant heater is needed when the temperature is below 5°C
- Humidity: Less than 90%
- Altitude: Below one thousand (1000) meters above sea level

Factory Inspection

- Inspection items
- Protection devices working test
- Starting ability in normal temperature
- 50% rated power load moment capability
- Voltage deviation and speed varying: 0%, 25%, 50%, 75%, 100%, 110% Load

Painting Process


- Painting process specifications and colors are based on the manufacturer's standard
- The customer could also choose the color which the manufacturer offers

B. GENERAL FEATURES

- Cummins engine 4BTA3.9-G2
- Close coupled to a Stamford alternator UCI224E
- Microprocessor control module PLC-7420
- ABB main circuit breaker: 100A
- Rotate speed governor: Mechanical governor
- Excitation System: Self Excited SHUNT
- A.V.R. Model: AS440
- Key switch
- Emergency stop switch
- ATS (automatic transfer switch) receptacle
- Remote run connextor
- 2x12V/70AH sealed for life maintenance free battery
- Lockable battery isolator switch
- Powder Coated Canopy
- 50°C Radiator
- Oil pump on the engine
- Non-returning valve for fuel inlet hose of the engine
- Steel base frame with forkslots

- Vibration isolators between the engine/alternator and base frame
- Dry type air filter
- Base fuel tank for 27 hours running
- Drain points for fuel tank
- Breather valve for fuel tank
- Operation Manual / Specifications

C. GENERAL TECHNICAL DATA

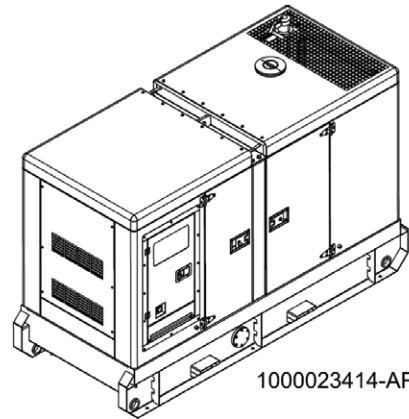


1000023414-AP1-B2

MODEL	DGPL66C - 3
STRUCTURE TYPE	R
TANK CAPACITY	360 L
DRY WEIGHT	1524 kg
NOISE LEVEL @ 7M	68.1 dBA
DIMENSIONS	2688 x 1080.5 x 1759 mm
STANDBY POWER	66 kVA / 48.8 kW
PRIME POWER	60 kVA / 48 kW
VOLTAGE/AMPERE	415V / 83A

GENSET FUEL CONSUMPTION					
Freq./Load	25%	50%	75%	100%	110%
50Hz (L/h)	3.8	6.7	9.8	13.1	14.7

DIESEL ENGINE

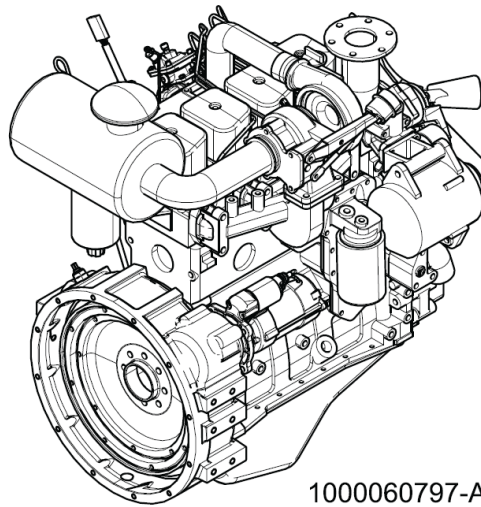


1000060797-AP1-B4

ENGINE SPECIFICATIONS

1	ENGINE MANUFACTURER/BRAND	Cummins
2	ENGINE MODEL	4BTA3.9G2
3	DIMENSIONS	884.9 x 748.4 x 985.6 mm
4	DRY WEIGHT (APPROX.)	350 kg
5	NUMBER OF CYLINDERS	4
6	BORE	102 mm
7	STROKE	120 mm
8	DISPLACEMENT (LITER)	3.9 L
9	COMPRESSION RATIO	16.5
10	TYPE OF INJECTION	Direct Injection
11	INTAKE SYSTEM	Turbocharged,water-to-air charge cooled
12	INTAKE RESISTANCE	6.28 kPa
13	COOLING SYSTEM	Water Cooled
14	FAN	Pusher
15	BATTERY VOLTAGE	12/24V
16	TYPE OF FUEL	Diesel
17	TYPE OF OIL	15W40-CF4
18	OIL CAPACITY	9.5 L
19	TYPE OF COOLANT	Glycol Mixture
20	COOLANT CAPACITY	20.8 L
21	BACK PRESSURE	10.1 kPa
22	STANDBY POWER	55 kW
23	PRIME POWER	50 kW
24	FUEL CONSUMPTION (100% LOAD)	216 g/kWh

DIESEL GENERATION AUSTRALIA

ALTERNATOR




1000069716-AP1-A4
Stamford

ALTERNATOR SPECIFICATIONS

1	ALTERNATOR MANUFACTURER/BRAND	Stamford
2	ALTERNATOR MODEL	UCI224E
3	EXCITER	Brushless
4	COOLING FAN	Cast Alloy Aluminum
5	WINDINGS	100% Copper
6	INSULATION CLASS	H
7	WINDING PITCH	2 / 3
8	TERMINALS	12
9	DRIP PROOF	IP23
10	ALTITUDE	≤ 1000m
11	OVERSPEED	2250rpm
12	AIR FLOW	0.11m³/s(50Hz),0.135m³/s(60Hz)
13	VOLTAGE REGULATION	± 0.5%
14	TOTAL HARMONING TGH / THCat No Load < 1.5%	on load < 5%
15	TELEPHONE INTERFERENCE	THF < 2%; TIF <50

PLC-7420 CONTROL SYSTEM

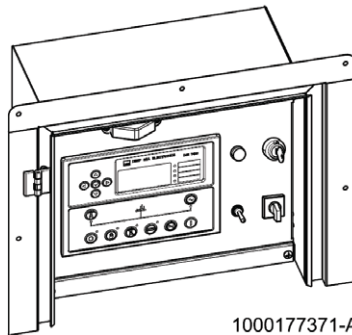

1000177371-AP1-C2



PLC-7420 is an advanced control module based on microprocessor, containing all necessary functions for protection of the genset and the breaker control. It can monitor the mains supply, and automatically start the engine when the mains is abnormal. Accurately measure various operational parameters and display all values and alarms information on the LCD. In addition, the control module can automatically shut down the engine and indicate the engine failure.

- Microprocessor control, with high stability and credibility
- Monitoring and measuring operational parameters of the mains supply and genset
- Indicating operation status, fault conditions, all parameters and alarms
- Multiple protections; multiple parameters display, like pressure, temp. etc.
- Manual, automatic and remote work mode selectable
- Real time clock for time and date display, overall runtime display, 250 log entries
- Overall power output display
- Integral speed/frequency detecting, telling status of start, rated operation, overspeed etc.
- Communication with PC via RS485 OR RS232 interface, using MODBUS protocol



D. OVERALL DIMENSION

1000023414-DR1-B2

Dry weight	1551kg
Fuel tank capacity	360L
Dimensions L x W x H	2688x1081x1759mm

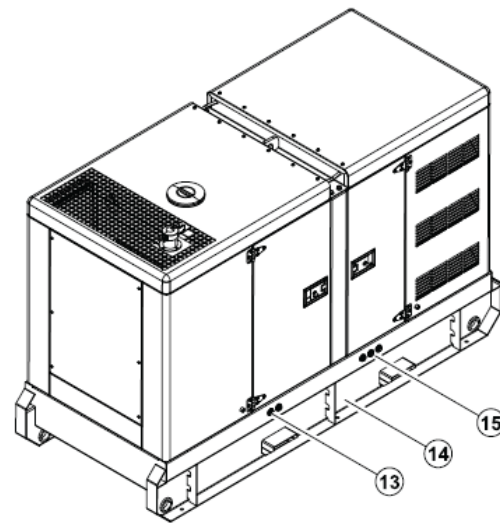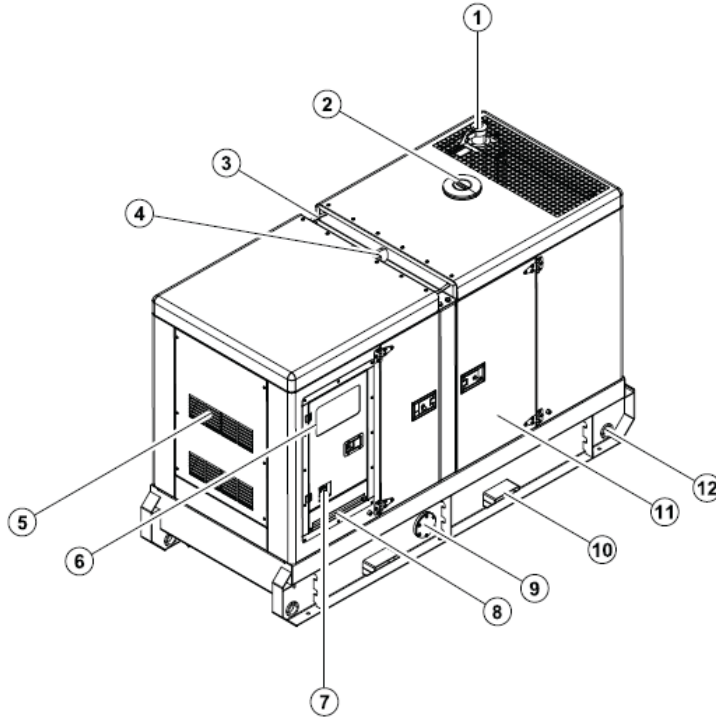


- ⑧ Cable trench
- ⑦ Emergency stop switch
- ⑥ Control cabinet
- ⑤ Air inlet
- ④ Lifting lug
- ③ Roping lug
- ② Coolant inlet
- ① Exhaust gas outlet
- ⑮ Coolant/Oil drain hose fitting
- ⑭ Base frame
- ⑬ External fuel inlet/return hose fitting
- ⑫ Tie down
- ⑪ Access door
- ⑩ Fork lift channel
- ⑨ Fuel drain

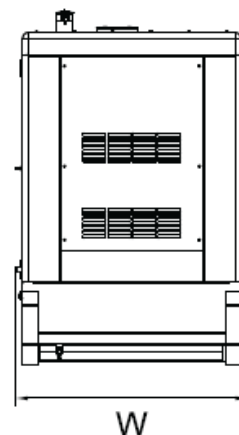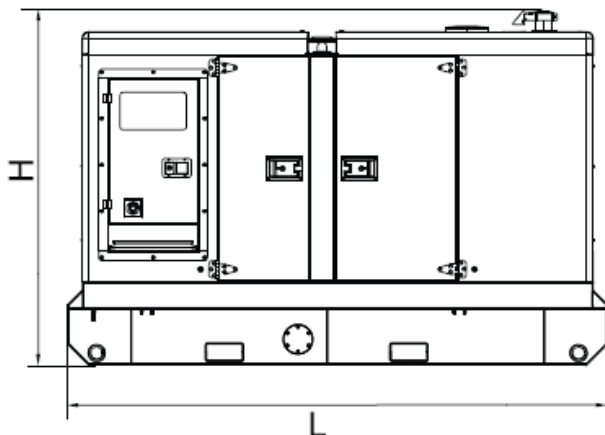


DIMENSIONS	2688 x 1080.5 x 1759 mm
DRY WEIGHT	1524 kg

E. CONTROL SYSTEM

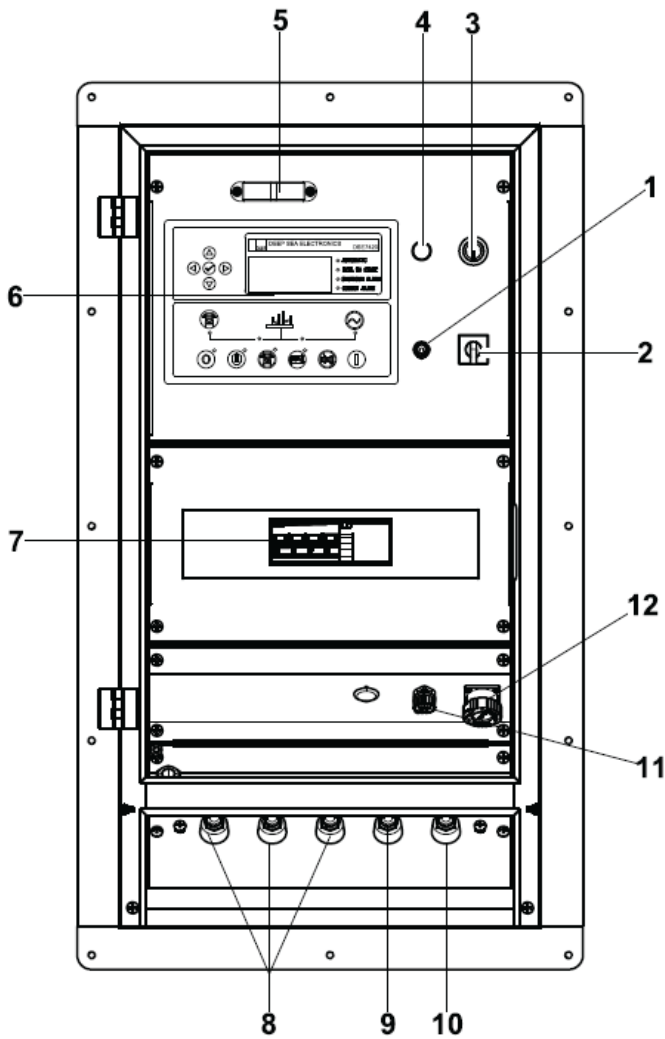

Control & Field wiring cabinet

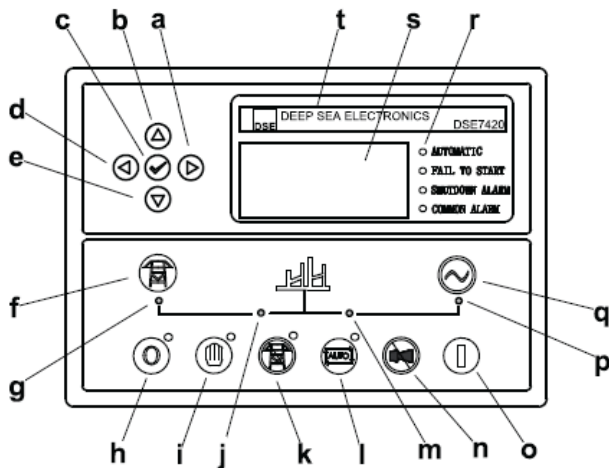

Control module

Ref.	Description
1	Control Cabinet Lamp Switch
2	Mains Input Changeover Switch
3	Charge Indicator
4	Key Switch
5	Control Cabinet Lamp
6	Control Module
7	Main Circuit Breaker
8	Live Wire Terminals
9	Neutral Wire Terminal
10	Ground Wire Terminal
11	Remote Communication Interface
12	ATS Communication Interface

a.	Button (next page)
b.	Button (increase value / previous item)
c.	Button (accept)
d.	Button (previous page)
e.	Button (decrease value / next item)
f.	Button (transfer the load to the mains supply, when in Manual)
g.	Mains supply available LED
h.	Stop / Reset Button
i.	Manual button (manual control mode)
j.	Mains supply on load LED
k.	Test button (test mode)
l.	Auto button (auto mode)
m.	Genset on load LED
n.	Mute / Lamp test button
o.	Start button (manual)
p.	Genset available LED
q.	Button (transfer the load to the genset, when in manual mode)
r.	Alarm LED (4 alarm items)
s.	LCD Display
t.	Control Module Name

1000023414-F3-E

10.2020