

# P7500i #HAU

Compact & Solid

**DGA**  
POWER ANYTIME



## FEATURES

- Inverter technology: stable power for safe operation of sensitive electronics.
- OHV engine provides consistent power for multiple applications.
- Low-oil level shutdown automatically safeguards engine from damage.
- Economy mode automatically adjusts the engine speed to the optimum level to provide excellent fuel economy and noise reduction.
- USB ports charges your mobile electronics so you can stay connected.
- Compact and Solid Canopy
- Easily transportable by handle.
- Ideal for applications requiring low noise
- Connector for Parallel kit
- Oil Bottle, Funnel and Plugs Included in the carton box



## POWERRUSH

MORE STARTING CAPACITY ALLOWING YOU TO DO MORE WITH LESS.  
Powerrush increases electrical current upon demand, above rated output when starting electric motors.

## PERFORMANCE

Frequency	Hz	50
Voltage	V	230
Phase		1
Max Power	watt	7000
Rated Power	watt	6500



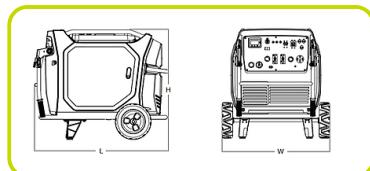
**Engine**

Engine Brand	Pramac	
Type	OHV	
Exhaust emission level	Stage V	
Operating Speed Nominal	rpm	Variable
Fuel	Petrol	
Starting Systems	Electric (+Recoil)	
Oil capacity	l	1.45
Low Oil Shutdown	√	

**Alternator**

Voltage regulation system	Inverter	
<b>Dimensional data</b>		

Length	(L) mm	950
Width	(W) mm	765
Height	(H) mm	773
Dry weight	kg	146
Carton box dimension LxWxH	mm 1010x660x742	

**Autonomy**

Fuel tank capacity	25
Fuel consumption 75%	l/h
Running time 75%	h

**Noise level**

Guaranteed noise level (LWA)	dB(A)	92
Noise pressure level @ 7 m	dB(A)	64

**GENSET CONTROL****COMMANDS / INSTRUMENTATION**

- Selector switch: O/I | Power Button
- Economy mode automatically adjusts the engine speed to the optimum level to provide excellent fuel economy and noise reduction.
- 2 wire Starter connection
- Parallel kit connection
- Outputting energy (light - Green) • Overloading and Oil alarming (light - Red)
- Voltmeter / Hourmeter / Frequency meter / Fuel Gauge

**PROTECTIONS**

- Over-load, Oil Guard, Short Circuit, High temperature, Over-speed protections
- Protection Control panel IP 44

**OUTPUT:**

- n°2 USB DC 5V 2A

**SOCKET TYPE**

AS/NZS 3112 15A 250V	2
AS/NZS 3123 30A 250V IP66	1

The information is aligned with the Data file at the time of download.  
Printed on 08/02/2026 (ID 20769)