


## POWER ANYTIME

### GH6000EH 7.5kVA HONDA

**7.5kVA  
HONDA  
GH6000EH**

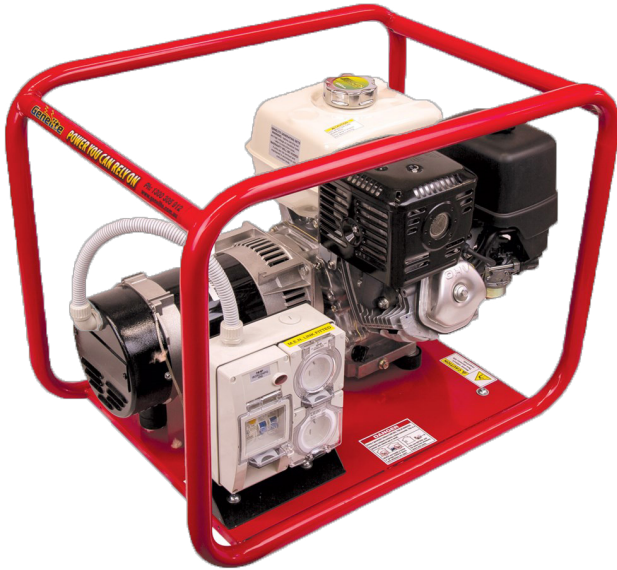

#### ENGINE

<b>MANUFACTURER</b>	Honda
<b>ENGINE MODEL</b>	GX390E
<b>TYPE &amp; CYLINDER</b>	O.H.V.
<b>STARTING</b>	Recoil & Electric Start
<b>RUN TIME</b>	2.6hr @ 100%, 3.8hr @ 60% load
<b>FUEL</b>	Unleaded Petrol
<b>CUBIC CAPACITY</b>	389 cm3
<b>HP 3000 RPM CONT</b>	8HP
<b>OIL CAPACITY</b>	1.1L

#### TECHNICAL

<b>MODEL</b>	GH6000EH
<b>TYPE</b>	Portable
<b>FREQUENCY</b>	50Hz
<b>PHASE/VOLTAGE</b>	1/240

SPEED	POWER		NOISE LEVEL	FUEL CAPACITY	CONTINUOUS OUTPUT
	Max Power		dBA @7m see *1		
	kW	kVA	dBA		
3000RPM	6.0	7.5	72	6.1L	7.5kVA

#### ADDITIONAL INFO

<b>OUTLETS</b>	2 x 15 amp 240V IP66 outlets with CB & RCD
<b>FRAME</b>	Extra large roll frame

#### ALTERNATOR

<b>ALTERNATOR BRAND</b>	Mecc Alte
<b>TYPE</b>	Brushless
<b>HARMONIC DISTORTION</b>	Less than 5%
<b>INSULATION CLASS</b>	Class H

#### DIMENSIONS

<b>LENGTH</b>	85cm
<b>WIDTH</b>	60cm
<b>HEIGHT</b>	56cm
<b>WEIGHT</b>	75kg

#### OPTIONS

- 2 or 4 wheel kit
- Long Range Tank (15l capacity)
- Oversized, Single or 3 phase alternators